

FORM

Porcelain
Rectified

Gres porcellanato
Rettificato

Feinsteinzeug
Kalibriert

Grès cérame
Rectifié

Керамогранит
Ректифицированная



RET V3 5

Colours

Colori • Farben • Couleurs • Цветов



Light



Cement



Grey

Sizes

Formati • Formate • Format • Форматы

Surface	10mm				20mm	
	NAT	NAT	AS	NAT	AS 2.0	NAT
Light	Form Light 60180 CSAFORLI60	Form Light 60120 CSAFORLI12	Form Light 60120 As CSAFOLIA12	Form Light 9090 CSAFORLI90		
Cement	Form Cement 60180 CSAFOCEM60	Form Cement 60120 CSAFORCE12	Form Cement 60120 As CSAFOCEA12	Form Cement 9090 CSAFORCE90	Form Cement 60120 As 2.0 CSAFOCA212	Maze 9090 CSAMAZE190
Grey	Form Grey 60180 CSAFORGR60	Form Grey 60120 CSAFORGR12	Form Grey 60120 As CSAFOGRA12	Form Grey 9090 CSAFORGR90		
Pz / Box	2	2	2	2	1	2
Mq / Box	2,16	1,44	1,62	1,62	0,72	1,62
Kg / Box	47,5	31,7	35,6	35,6	31,7	35,6
Kg / Mq	22	22	22	22	44	22
Boxes / Pallet	24	24	20	20	24	20
Mq / Pallet	51,84	34,56	32,4	32,4	17,28	32,4
Kg / Pallet	1.140	761	712	712	761	712

Decors&Accessories

Suggestion for laying

Consigli per la posa • Ratschläge für die Verlegung • Conseil pour la pose • Советы по укладке

Considering the characteristics of this series we suggest:

- 2-3 mm joint
- Lined up laying or 4/5 staggered laying is suggested

Im Hinblick auf die Eigenschaften der Serie es empfiehlt sich:

- 2-3 mm Fuge
- Neben verlegt oder 4/5 versetzt

Viste le caratteristiche della serie si consiglia:

- Fuga 2-3 mm
- Si consigliano pose affiancate o a correre sfalsate di 4/5


Vu les caractéristiques de la série, nous conseillons :

- Joint 2-3 mm
- Il est conseillé une pose alignée ou une pose décalée au 4/5

В силу характеристик данной серии рекомендуется:

- Шов 2-3 мм
- Рекомендуется укладка рядами или со смещением на 4/5

Decors&Accessories

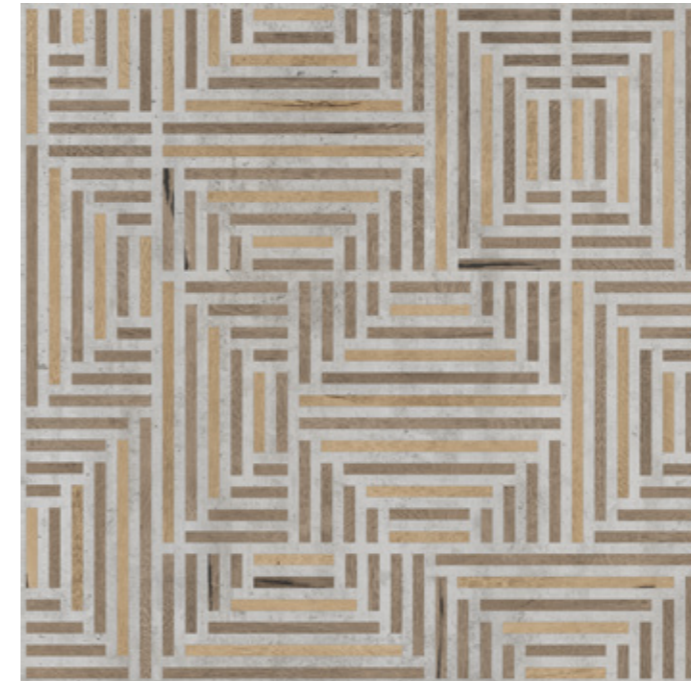

90x90 36"x36"
Maze 9090*
CSAMAZE190

*Available in one colour version only

Number of patterns

Numero di grafiche • Grafische Nummer • Nombre d'images • Количество графических оформлений

60x180 24"x72" 30	60x120 24"x48" 40	90x90 36"x36" 40	Maze 90x90 36"x36" 6	As 2.0 60x120 24"x48" 40
-------------------	-------------------	------------------	----------------------	--------------------------


Special Trims • Pezzi Speciali • Formteile • Pièces Spéciales • Специальные Изделия

10mm				10mm			
NAT	NAT	NAT	AS	NAT	AS	NAT	AS
Battiscopa 90 7,3x90 27/8"x36"	Battiscopa 60 7,3x60 27/8"x24"	Gradone 120* 33x120 13"x48"		Ang. Gradone 120 Sx* 33x120 13"x48"		Ang. Gradone 120 Dx* 33x120 13"x48"	
Battiscopa 90 Form Light CSABFOLI90	Battiscopa 60 Form Light CSABFOLI60	Grad 120 Form Light CSAGFOLI12	Grad 120 Form Light As CSAGFLAS12	Ang. Grad 120 Sx Form Light CSAGASFL12	Ang. Grad 120 Sx Form Light As CSAGSFLA12	Ang. Grad 120 Dx Form Light CSAGADFL12	Ang. Grad 120 Dx Form Light As CSAGDFLA12
Battiscopa 90 Form Cement CSABFOCE90	Battiscopa 60 Form Cement CSABFOCE60	Grad 120 Form Cement CSAGFOCE12	Grad 120 Form Cement As CSAGFCAS12	Ang. Grad 120 Sx Form Cement CSAGASFC12	Ang. Grad 120 Sx Form Cement As CSAGSFGA12	Ang. Grad 120 Dx Form Cement CSAGADFC12	Ang. Grad 120 Dx Form Cement As CSAGDFCA12
Battiscopa 90 Form Grey CSABFOGR90	Battiscopa 60 Form Grey CSABFOGR60	Grad 120 Form Grey CSAGFOGR12	Grad 120 Form Grey As CSAGFGAS12	Ang. Grad 120 Sx Form Grey CSAGASFY12	Ang. Grad 120 Sx Form Grey As CSAGSFGA12	Ang. Grad 120 Dx Form Grey CSAGADFY12	Ang. Grad 120 Dx Form Grey As CSAGDFGA12
8	14	2		1		1	

Nat	R10	A+B	ASTM	DCOF	PTV ≥ 36	***	10mm	EN 14411 APPENDICE G Bla GL
As	R11	A+B+C	ASTM	DCOF	PTV ≥ 36	***	10mm	EN 14411 APPENDICE G Bla GL
As 2.0	R11	A+B+C	ASTM	DCOF	PTV ≥ 36	***	20mm	EN 14411 APPENDICE G Bla UGL

Surfaces

Superfici • Oberflächen • Surfaces • Поверхности

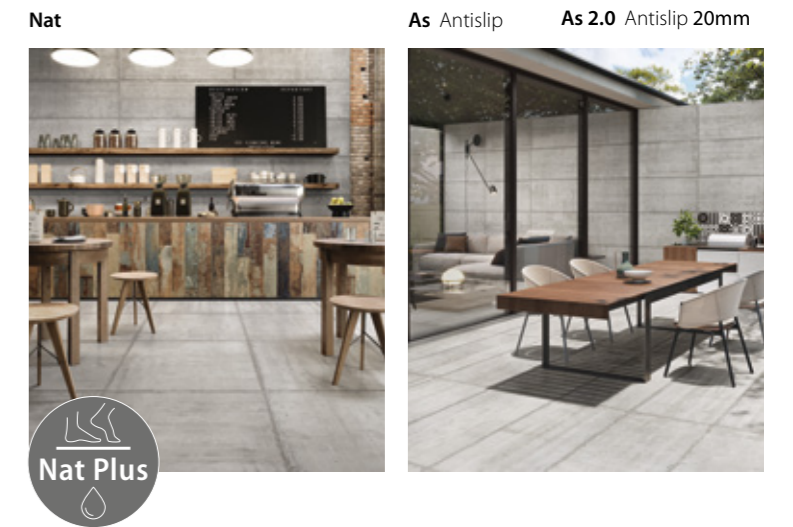

Pendulum Friction Test - BS 7976

Metodo del Pendolo

- * Determination of slip resistance of pedestrian surfaces; it does not coversports surfaces and road surfaces for vehicles (skid resistance).
Determinazione della resistenza allo scivolamento delle superfici pedonabile; non si applica alle pavimentazioni sportive ed alle pavimentazioni stradali veicolabili.
- ** Anti-slip performance is guaranteed at the time of delivery of the product.
Le presatazioni Anti-slip vengono garantite al momento della consegna del prodotto.
- *** Pendulum Friction Test - AS 4586 / UNE-ENV 12633 on demand / su richiesta.

Certifications

Certificazioni • Zertifizierungen • Certifications • Сертификаты



** Static coefficient of friction
ASTM test
ASTM C1028 - 06

Dynamic coefficient of friction
DCOF AcuTest*
ANSI A137.1 - 2012

Dry μ > 0,6 Wet μ > 0,6 WET ≥ 0,42
Natural Surface - Antislip

10mm